

Single hole earth point

Hole size	Length	Weight each	Part No.
M8 x 15mm	80mm	0.14kg	PC100-FU
M10 x 15mm	80mm	0.14kg	PC101
M12 x 15mm	80mm	0.14kg	PC102
M16 x 15mm	80mm	0.14kg	PC103

Stem diameter = 10.7mm (70mm²).



BS 7430

Two hole earth point

Hole size	Length	Weight each	Part No.
M8 x 12mm	80mm	0.44kg	PC115-FU
Supplied c/w front plate for connection of 25mm x 3mm copper tape or 70mm ² stranded copper cable.			PC120
M8 x 12mm	80mm	0.44kg	
Supplied c/w front plate for connection of 25mm x 3mm copper tape or 8mm diameter solid circular copper.			PC125
M8 x 12mm	80mm	0.28kg	



BS EN 50164-1 Class H, BS 7430



Tightening torque 8Nm

Four hole earth point



Hole size	Length	Weight each	Part No.
M8 x 14mm	75mm	0.41kg	PC110

Stem diameter = 10.7mm (70mm²).



BS 7430



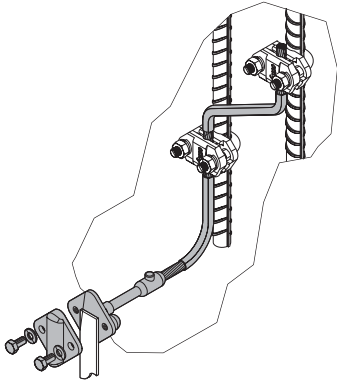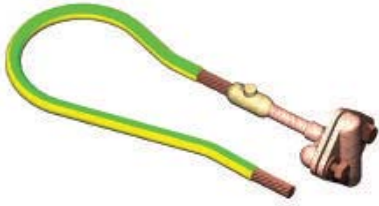

Earth point with pre-welded tail

Description	Weight each	Part No.
As PC100-FU with prewelded 500mm long tail of 70mm ² PVC insulated earth cable	0.56kg	PC105
As PC101 with prewelded 500mm long tail of 70mm ² PVC insulated earth cable	0.56kg	PC106
As PC102 with prewelded 500mm long tail of 70mm ² PVC insulated earth cable	0.56kg	PC107
As PC103 with prewelded 500mm long tail of 70mm ² PVC insulated earth cable	0.56kg	PC108
As PC110 with prewelded 500mm long tail of 70mm ² PVC insulated earth cable	1.14kg	PC111
As PC115-FU with prewelded 500mm long tail of 70mm ² PVC insulated earth cable	0.84kg	PC116
As PC120 with prewelded 500mm long tail of 70mm ² PVC insulated earth cable	0.84kg	PC121
As PC125 with prewelded 500mm long tail of 70mm ² PVC insulated earth cable	0.84kg	PC126-FU


For earth points PC100-FU etc. please refer to page 89.



BS EN 50164-1 Class H, BS 7430



Tightening torque 8Nm



NEW Earth point with double pre-welded tail

Description	Weight each	Part No.
As PC110 but with 2 x 400mm prewelded long tail of 70mm ² PVC insulated earth cable	1.23kg	PC216
As PC115-FU but with 2 x 400mm prewelded long tail of 70mm ² PVC insulated earth cable	1.26kg	PC211
As PC120 but with 2 x 400mm prewelded long tail of 70mm ² PVC insulated earth cable	1.26kg	PC221

For earth points PC110 etc. please refer to page 89.



BS EN 50164-1 Class H, BS 7430



Tightening torque 8Nm